

Figure 1

00-091-DSK

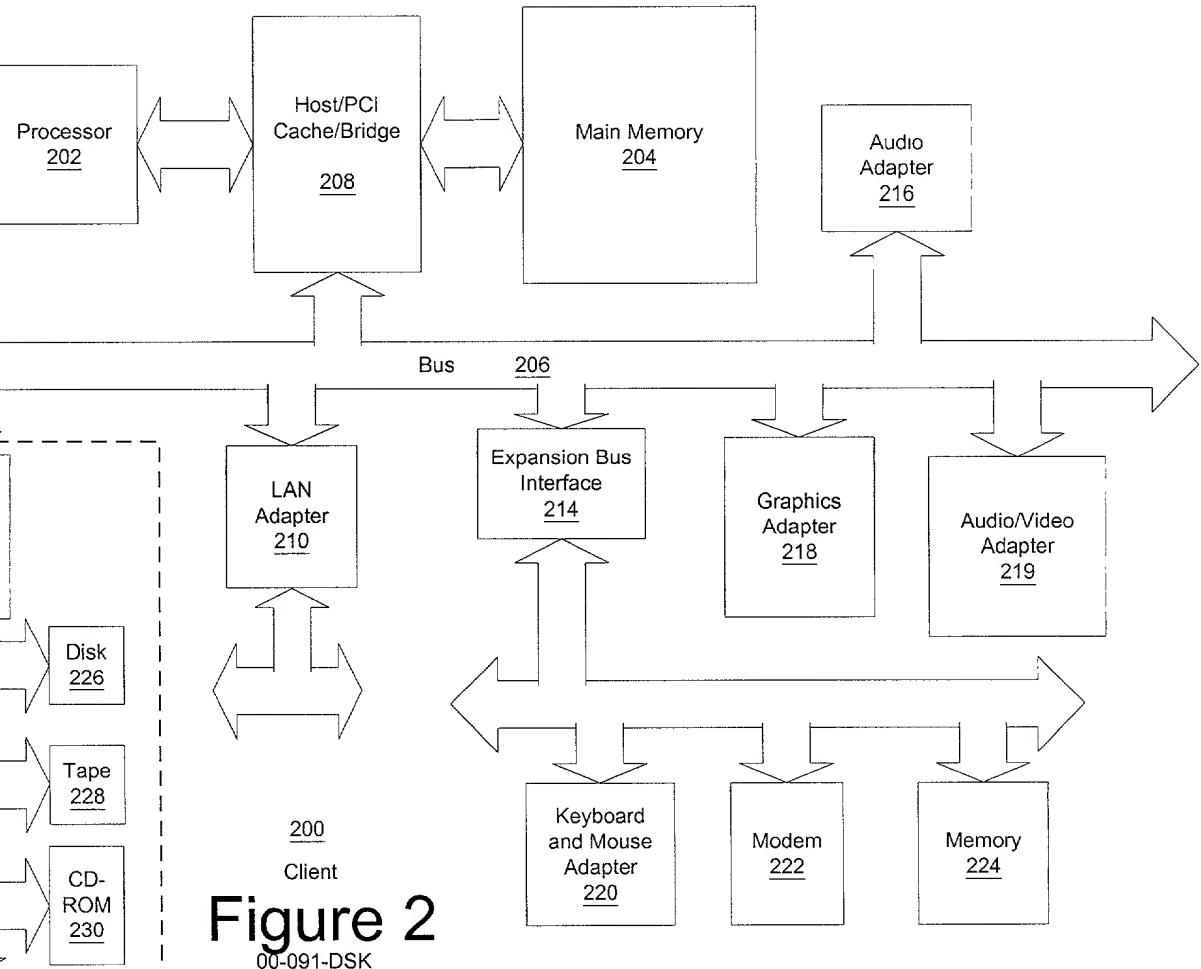
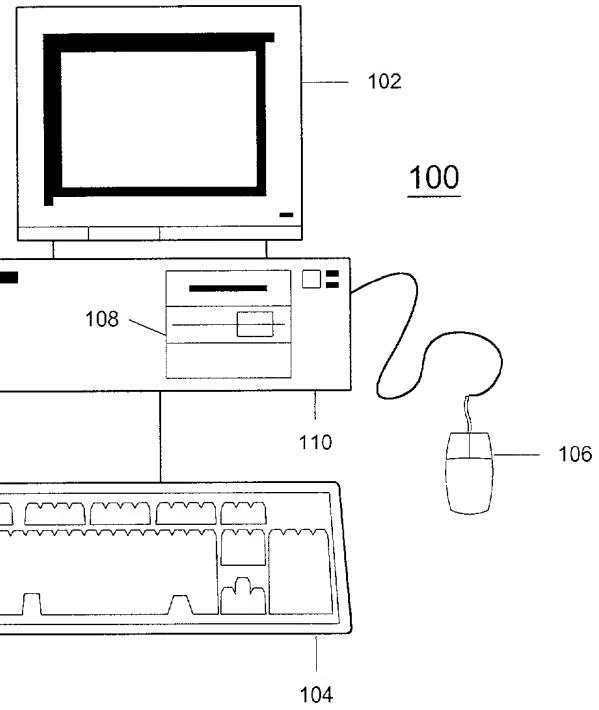


Figure 2

00-091-DSK
Page 1 of 7

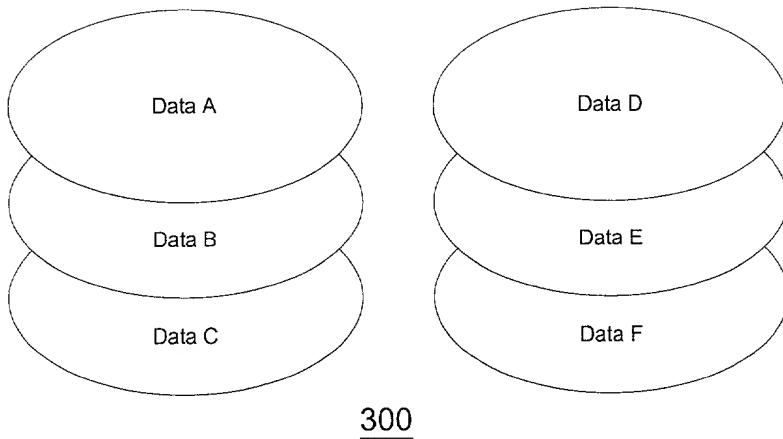


Figure 3A
00-091-DSK

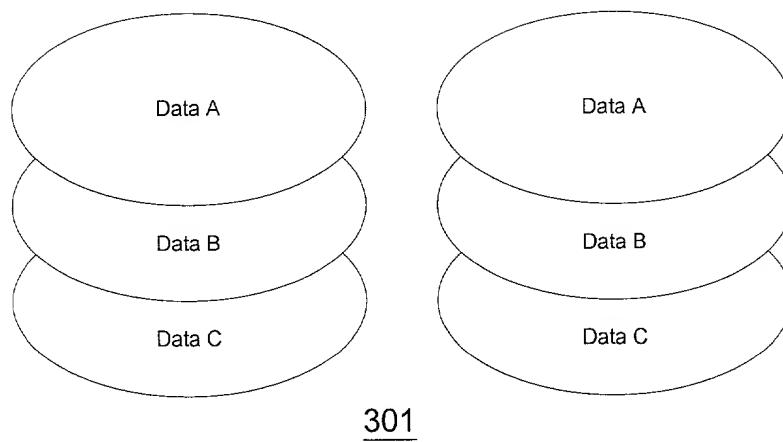


Figure 3B
00-091-DSK

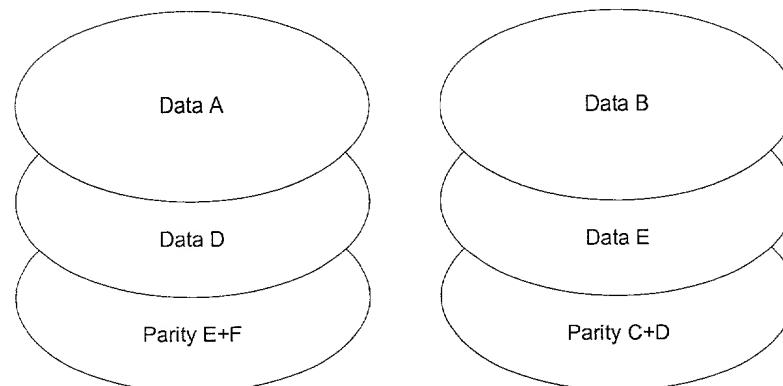
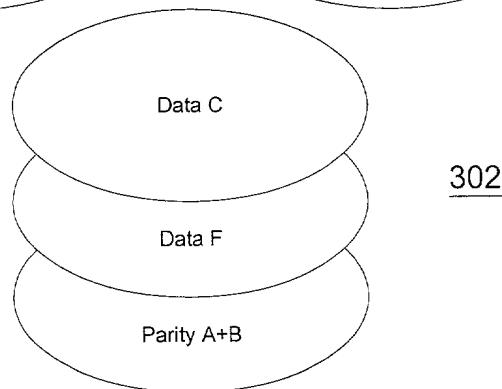


Figure 3C
00-091-DSK



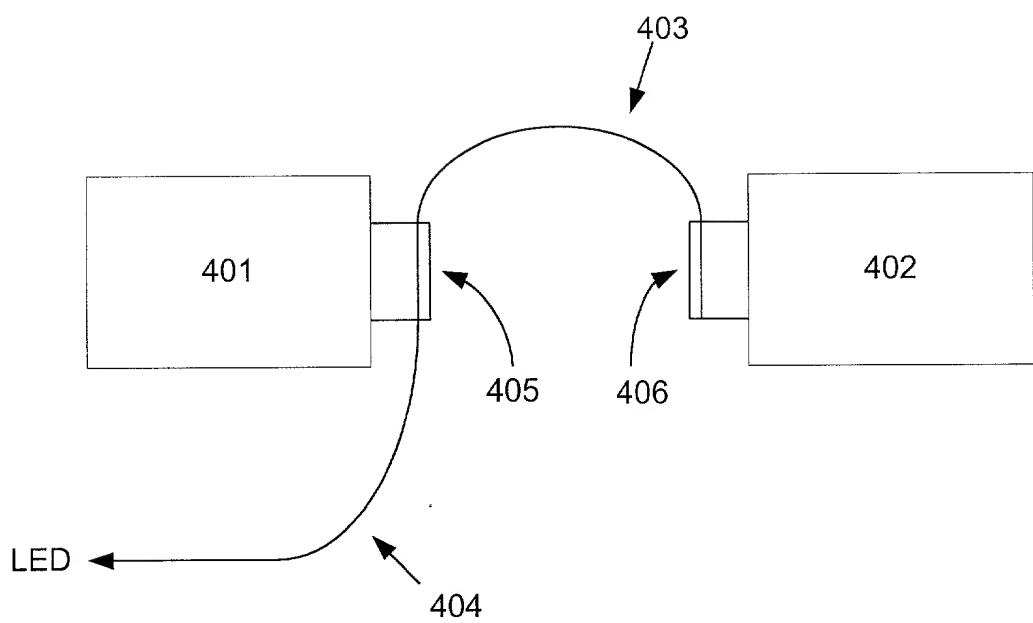


Figure 4

00-091-DSK
Page 3 of 7

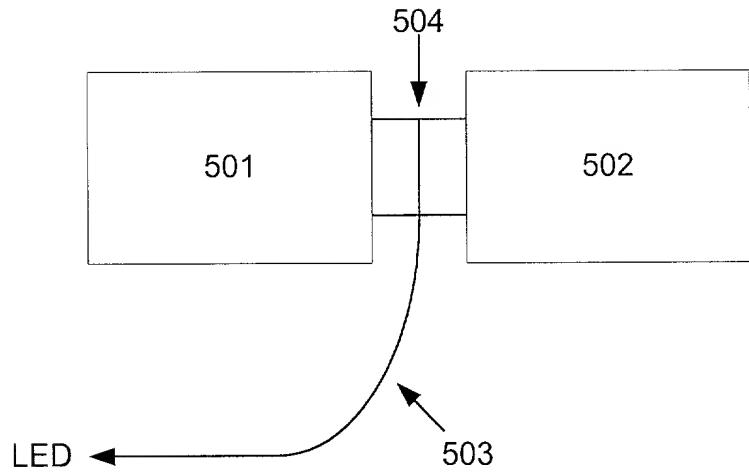


Figure 5A

00-091-DSK

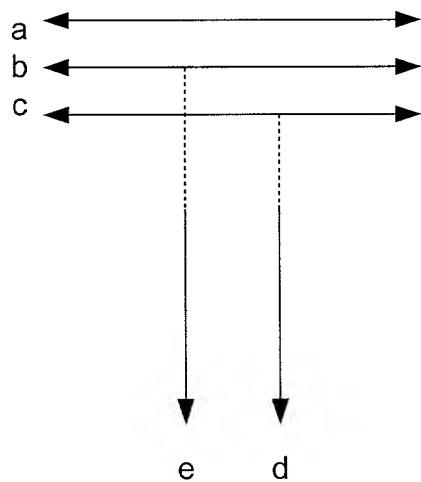


Figure 5B

00-091-DSK

EDGE OF FLEX CIRCUIT BETWEEN
SNAP FIT HALVES OF
CONNECTOR

Figure 6A

00-091-DSK


Page 5 of 7

FLEX ATTACHED TO STIFFENER
FOR STRAIN RELIEF

00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 0G 0H 0I 0J 0K 0L 0M 0N 0O 0P 0Q 0R 0S 0T 0U 0V 0W 0X 0Y 0Z

FLEX CIRCUIT
601

LED'S
602

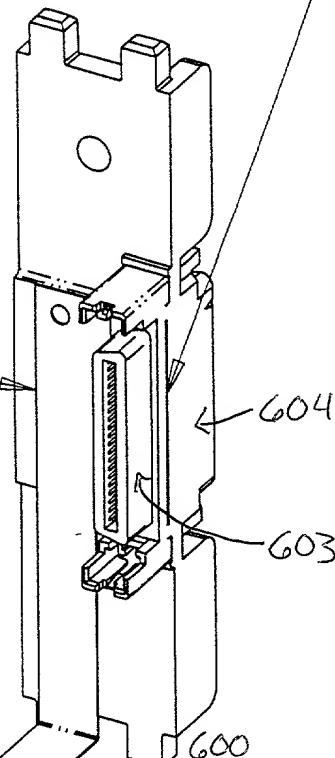

INTERPOSER FLEX CIRCUIT ASSEMBLY

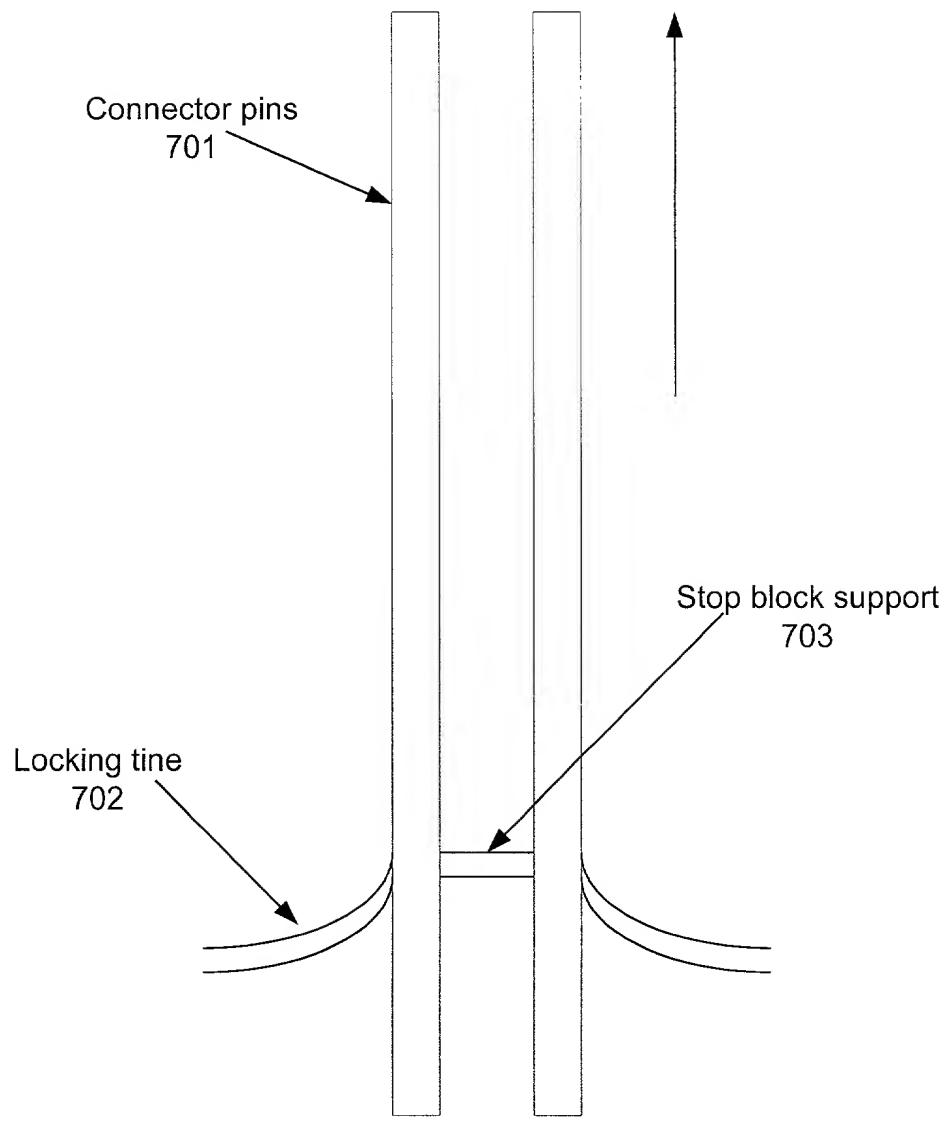


Figure 7

00-091-DSK
Page 6 of 7

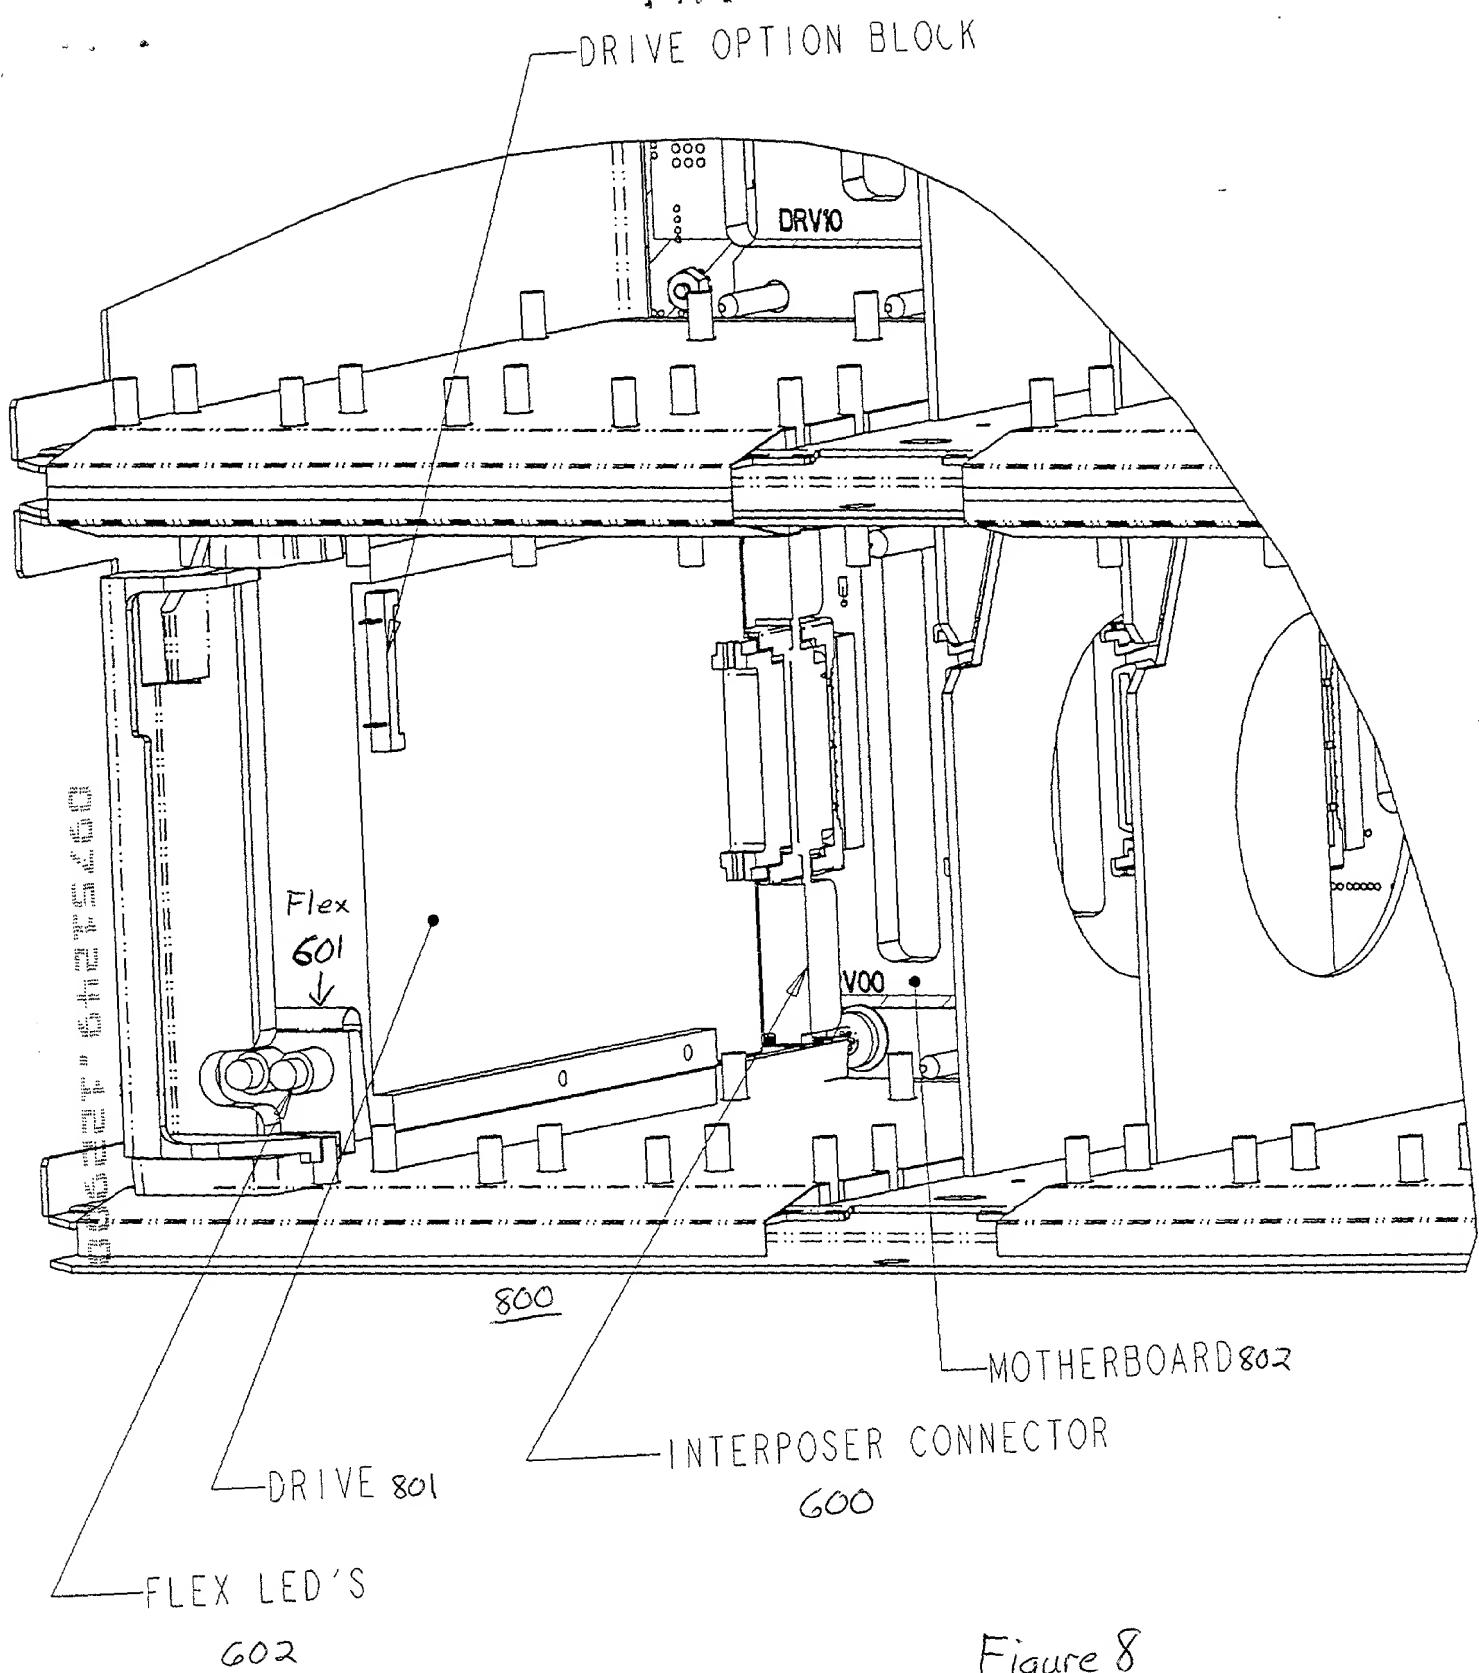


Figure 8

00-091-DSK

Page 7 of 7

DRIVE MODULE WITH INTERPOSER FLEX CIRCUIT INSERTED IN MOTHERBOARD